

SDRM201

Static / Dynamic Resistance Measurement Accessory for EGIL



- Enables resistance measurement on circuit breakers
- Small and light weight
- A number of operations can be run with short waiting intervals

Description

The SDRM201 is an accessory for EGIL. EGIL must be equipped with the SDRM option and CABA Win version R03A or higher is needed.

The SDRM201 is intended to use for both static and dynamic resistance measurements (SRM and DRM) on high voltage circuit breakers or other low resistive devices. Used together with EGIL the current and also the voltage-drop across the circuit breaker contacts are measured. The measuring unit can thus calculate the resistance as a function of time.

A system consists of an SDRM201 unit with current cables and an SDRM Cable. The SDRM Cable is a small box with integrated cables for connection to the SDRM201 and to EGIL.



The red current cable is 3.0 m (9.8 ft) and the black one is 0.5 m (1.6 ft).



The SDRM Cable.

Specifications SDRM201

Inaccuracy is specified for 1 year after calibration at 22 °C to 28 °C, relative humidity 90%. Specifications are valid, after 30 minutes warm up time. Specifications are subject to change without notice.

Environment

Application field The instrument is intended for use in high-voltage substations and industrial environments.

Installation category CAT I

Pollution degree 2

Temperature

Operating -20°C to +50°C (-4°F to +122°F)

Storage & transport -40°C to +70°C (-40°F to +158°F)

Vibration IEC 60068-2-6

2 g for 5 - 500 Hz

Shock (non-operating) IEC 60068-2-27

30 g, half-sine, 11 ms

Degree of protection

SDRM201/202 (Box) and IP 43

SDRM Cable intercon-

connected IP 41

Humidity 5% – 95% RH, non-condensing


CE-marking

LVD 2006/95/EC

EMC 2004/108/EC

General

Power inlet **24 V / 2.5 A**



Voltage 24 V DC (max) 21 V DC (min)

Current 2.5 A (max 50% intermittence)

Dimensions 160 x 240 x 90 mm

(6.3" x 9.4" x 3.5") excl. binding posts

Weight 1.3 kg (2.9 lbs)

2.5 kg (5.5 lbs) incl. current cables

Total incl. transport case 9.4 kg (20.7 lbs)

with accessories

SDRM Cable EGIL 0.2 m (0.7 ft), 0.6 kg (1.3 lbs)

Extension cable 7.5 m (24.5 ft), 0.7 kg (1.5 lbs)

SDRM201 – Terminals

CURRENT OUTPUT terminals – and +

Open circuit 2.5 V DC (max)

Short circuit current (max)

Instantaneous 500 A DC

After 2 seconds 150 A ±10%

Minimum current with

cables

Instantaneous 200 A DC

After 1 second 140 A DC

Overvoltage protection 45 V between terminals and between terminals and ground

Not to be connected to circuits generating peak power pulse above 1500 W (10/1000 µs)

SDRM Cable – Terminals

EGIL SDRM


Measurement ranges

DRM / MOTION mode 0 – 32 mΩ

SRM mode 0 – 2 mΩ

DRM mode 0 – 32 mΩ

SRM inaccuracy 2% ±2 µΩ

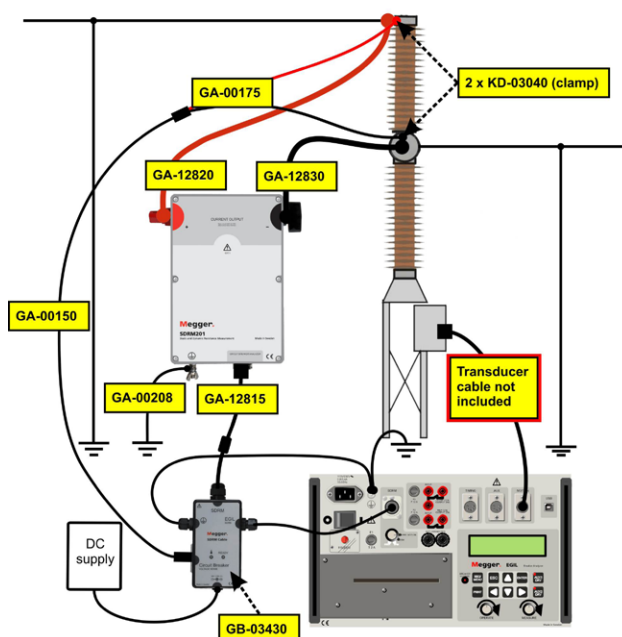

Ordering information

Item	Art. No.
SDRM201 for EGIL	CG-90250
Included accessories	
SDRM Cable	GB-03430
SDRM multi cable extension	GA-12815
Voltage sense	GA-00175
Voltage sense extension cable	GA-00150
Current cable (red)	GA-12820
Current cable (black)	GA-12830
Clamps (2 pcs)	KD-03040
Ground cable	GA-00208
Optional accessories	
Extension cables for multi cable	
10 m (33 ft) extension	GA-12810
7.5 m (24.6 ft) extension	GA-12815

SWEDEN

Megger Sweden AB
Eldarvägen 4, Box 2970
SE-187 29 TÄBY
T +46 8 510 195 00
F +46 8 510 195 95
E seinfo@megger.com

UK

Archcliffe Road Dover
CT17 9EN England
T +44 (0) 1304 502101
F +44 (0) 1304 207342

Other Technical Sales Offices

Dallas USA, Norristown USA,
Toronto CANADA, Trappes FRANCE,
Oberursel GERMANY, Johannesburg
SOUTH AFRICA, Kingdom of BAHRAIN
Mumbai INDIA, Chonburi THAILAND
Sydney AUSTRALIA

Registered to ISO 9001 and 14001
Subject to change without notice.
Art.No. ZI-CG03E • Doc.CG1850CE • 2013
SDRM201_DS_en_V03
www.megger.com
Megger is a registered trademark