
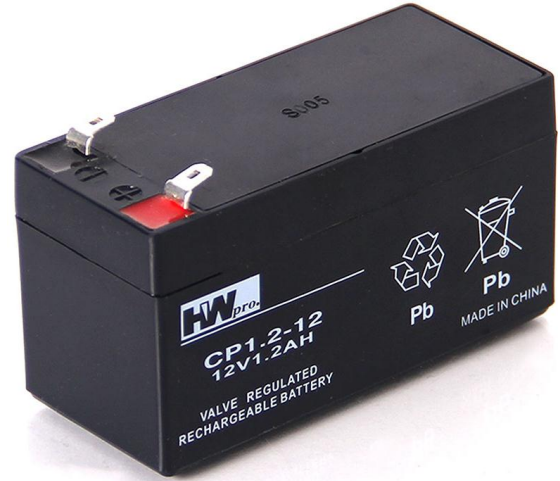


BATTERY LEAD ACID 12V 1.2A HW


Model: CP1.2-12

PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity (20HR)		1.2Ah
Dimension	Length	97±1mm (3.82 inches)
	Width	44±1mm (1.73 inches)
	Container Height	53±1mm (2.09 inches)
	Total Height	58±1mm (2.28 inches)
Weight		Approx. 0.55Kg (1.21lbs)
Standard Terminal		F1-Fasten Tab No.187E

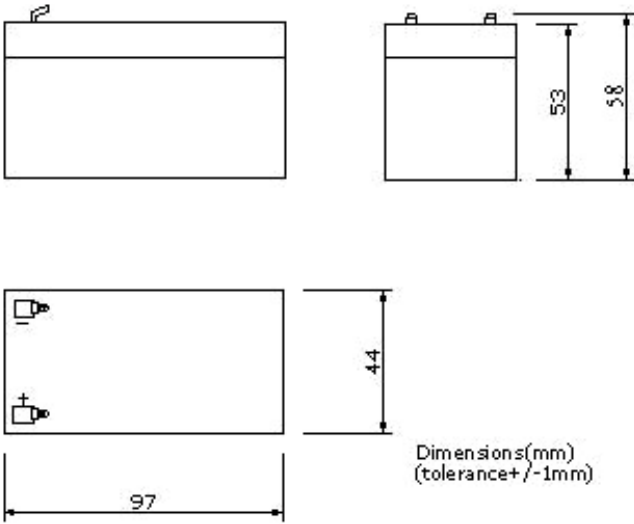

F1(Fasten Tab No.187E)
Standard Terminal

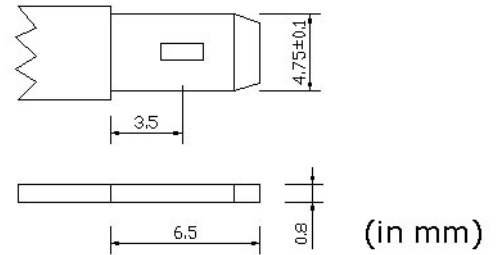


ELECTRICAL SPECIFICATION

Characteristics

Capacity	20 hour rate (0.06A)	1.2Ah
	10 hour rate (0.108A)	1.14Ah
	5 hour rate (0.204A)	1.02Ah
	3 hour rate (0.3A)	0.9Ah
	1hour rate (0.72A)	0.72Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Internal Resistance		Full charged battery (25°C, 77 °F) 50mΩ
Constant Voltage Charge	Cycle	Initial Charging Current less than 0.36A Voltage 14.4-15.0V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5-13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 ° F)

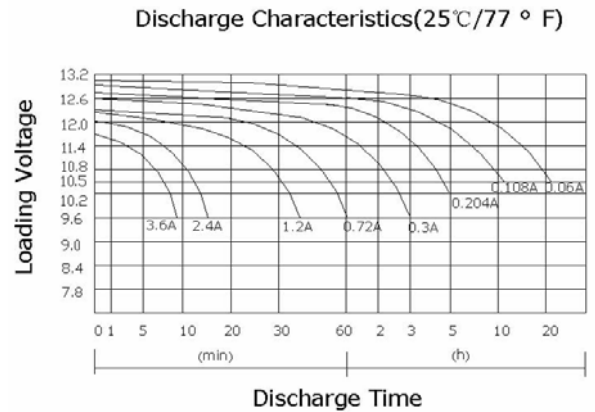

Made in China