



BATTERY LEAD ACID 12V 12A HW

Model: CP12-12

PHYSICAL SPECIFICATION



F2(Fasten Tab No.250E)
Standard Terminal

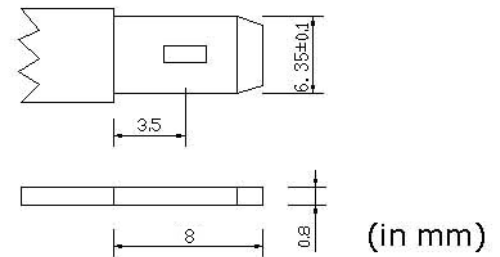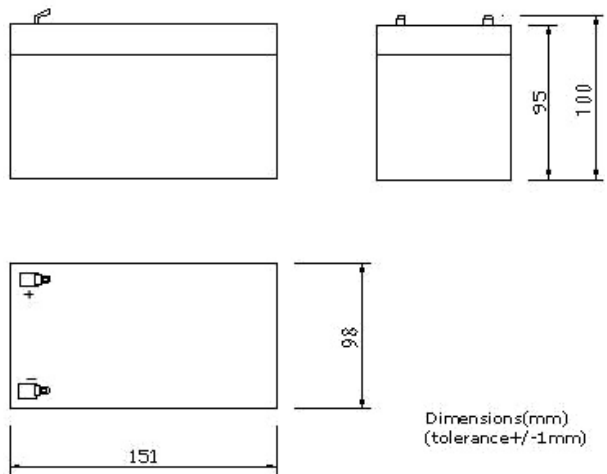


ELECTRICAL SPECIFICATION

Characteristics

Capacity	20 hour rate (0.6A) 10 hour rate (1.08A) 5 hour rate (2.04A) 1 hour rate (7.2A)	12Ah 11.4Ah 10.2Ah 7.2Ah
Capacity affected by temperature	40°C (104 °F) 25°C (77 °F) 0°C (32 °F)	102% 100% 85%
Internal Resistance	Full charged battery (25°C, 77 °F) 25mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 3.6A Voltage 14.4~15.0V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 ° F)

Discharge Characteristics(25°C/77 ° F)

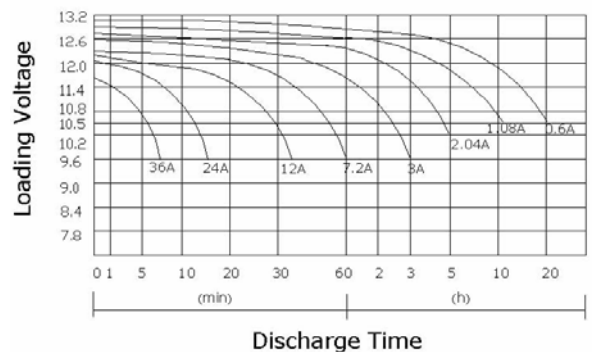

Made in China