


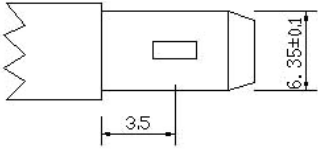



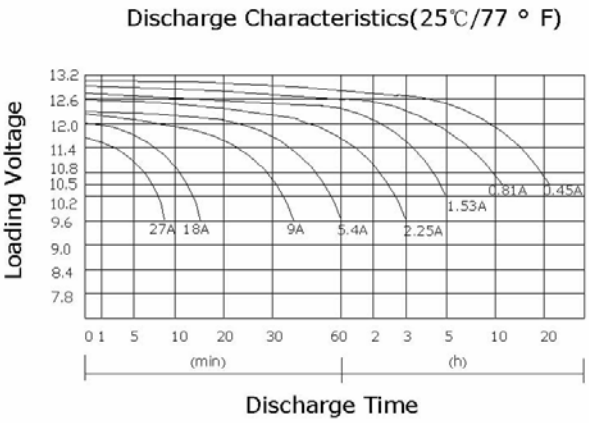
BATTERY LEAD ACID 12V 9A HW

Model: CP9-12

PHYSICAL SPECIFICATION

Nominal Voltage Nominal Capacity (20HR)		12V 9Ah		
Dimension	Length	151±1mm	(5.94 inches)	
	Width	65±1mm	(2.56 inches)	
	Container Height	95±1mm	(3.74 inches)	
	Total Height	100±1mm	(3.94 inches)	
Weight		Approx. 2.32Kg (5.11lbs)		
Standard Terminal		Fasten Tab No.250E		
 		<p>F2(Fasten Tab No.250E) Standard Terminal</p>   <p>(in mm)</p>		

ELECTRICAL SPECIFICATION

Characteristics			Discharge curves @ 25°C (77 ° F)
Capacity	20 hour rate	(0.45A) 9Ah	 <p>Discharge Characteristics(25°C/77 ° F)</p>
	10 hour rate	(0.81A) 8.5Ah	
	5 hour rate	(1.53A) 7.7Ah	
	3 hour rate	(2.25A) 6.8Ah	
	1hour rate	(5.4A) 5.4Ah	
Capacity affected by temperature	40°C (104 °F)	102%	
	25°C (77 °F)	100%	
	0°C (32 °F)	85%	
Internal Resistance	Full charged battery (25°C, 77 °F) 20mΩ		
Constant Voltage Charge	Cycle	Initial Charging Current less than 2.7A Voltage 14.4~15.0V at 25°C (77 °F) Temperature Coefficient -30mV/°C	
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C	