




# Watch Batteries **ENERGIZER**

## Model:364/363



### Industry Standard Dimensions

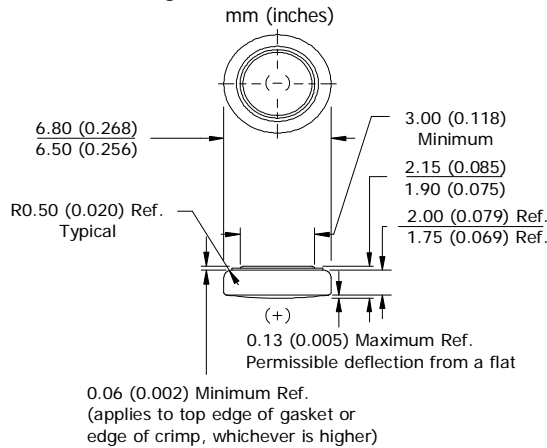


### Specifications

- Chemical System:** Silver Oxide (Zn/Ag<sub>2</sub>O)
- Designation:** IEC-SR60
- Nominal Voltage:** 1.55 Volts
- Typical Capacity:** 23 mAh\* (to 1.2 volts)
- Capacity Test:** 68K ohm continuous drain at 21 °C
- Typical Weight:** 0.37 grams
- Typical Volume:** 0.08 cubic centimeters
- Impedance (40 Hz):** 5 to 15 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.


### Cross Section

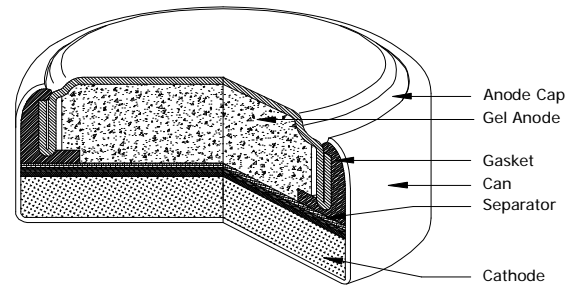

### Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

**Schedule:** Continuous  
**Typical Drain @ 1.47V:**  
 0.022 milliamperes  
**Load:** 68K ohm

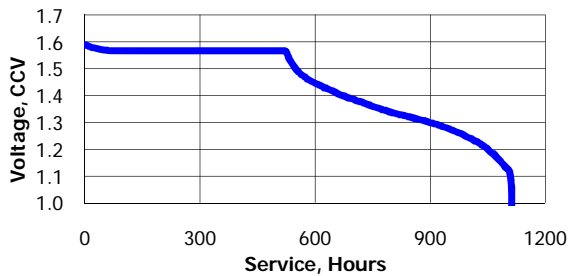


<u>Schedule</u>	<u>Typical Drains</u> at 1.47V (milliamperes)	<u>Load</u> (ohm)	<u>Cutoff</u> 1.2V (hours)
Continuous	0.022	68K	1,045

### Temperature Characteristics

Typical Performance at Low Discharge Rates

#### Service Effects

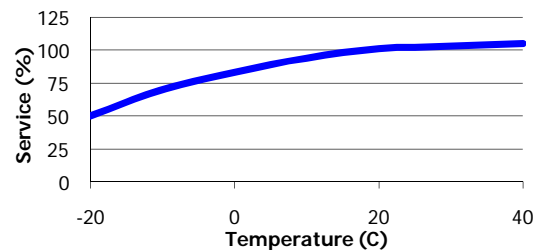

#### Storage Effects

