




# Watch Batteries ENERGIZER

## Model:371/370



II

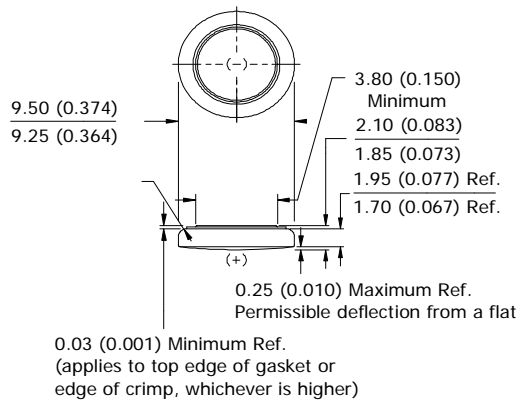


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN  
HIGH PULSE ON DEMAND

### Specifications

**Chemical System:** Silver Oxide (Zn/Ag<sub>2</sub>O)  
**Designation:** IEC-SR69  
**Nominal Voltage:** 1.55 Volts  
**Typical Capacity:** 35 mAh\* (to 1.2 volts)  
**Capacity Test:** 30K ohm continuous drain at 21°C  
**Typical Weight:** 0.7 grams  
**Typical Volume:** 0.15 cubic centimeters  
**Impedance (40 Hz):** 5 to 15 ohms


\* Varies according to the applied load, temperature, and cutoff voltage.

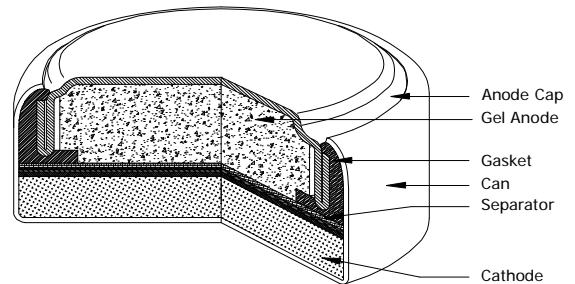

### Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

**Schedule:** Continuous  
**Typical Drain @ 1.53V:**  
 0.051 milliamperes  
**Load:** 30K ohm

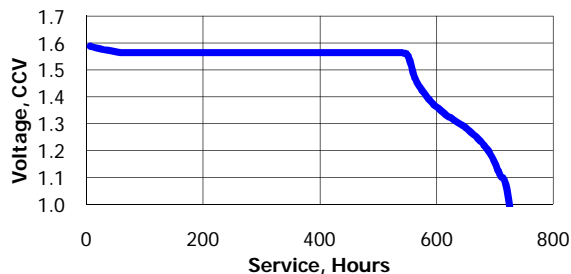


<u>Schedule</u>	<u>Typical Drains</u> at 1.53V (milliamperes)	<u>Load</u> (ohm)	<u>Cutoff</u> 1.2V (hours)
Continuous	0.051	30K	687

### Temperature Characteristics

Typical Performance at Low Discharge Rates

#### Service Effects

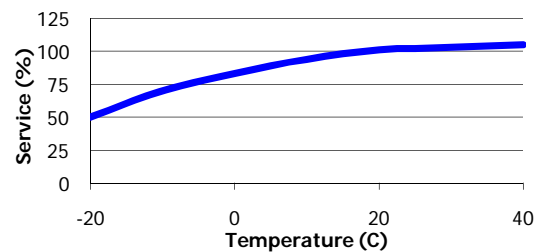

#### Storage Effects

