




Watch Batteries **ENERGIZER**

Model:377/376



Industry Standard Dimensions

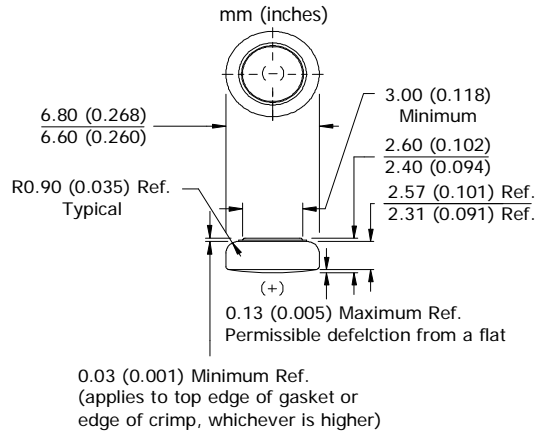


HIGH PULSE ON DEMAND

Specifications

Chemical System: Silver Oxide (Zn/Ag₂O)
Designation: IEC-SR66
Nominal Voltage: 1.55 Volts
Typical Capacity: 27 mAh* (to 1.2 volts)
Capacity Test: 45K ohm continuous drain at 21°C
Typical Weight: 0.42 grams
Typical Volume: 0.09 cubic centimeters
Impedance (40 Hz): 5 to 15 ohms

* Varies according to the applied load, temperature, and cutoff voltage.


Cross Section

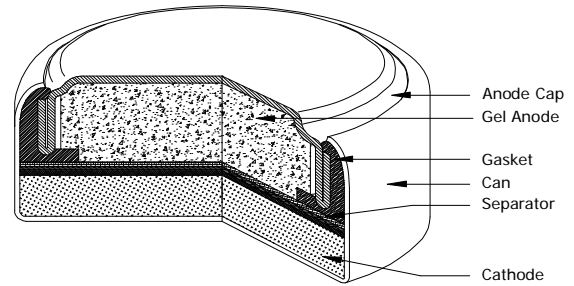

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Schedule: Continuous
Typical Drain @ 1.53V:
 0.034 milliamperes
Load: 45K ohm

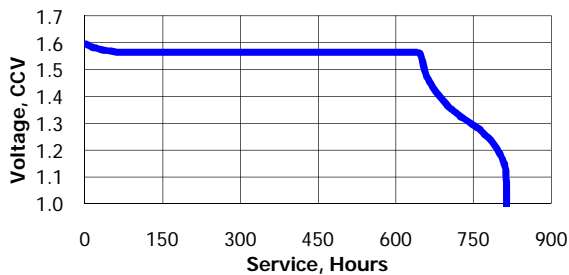


Schedule	Typical Drains at 1.53V (milliamperes)	Load (ohm)	Cutoff 1.2V (hours)
Continuous	0.034	45K	795

Temperature Characteristics

Typical Performance at Low Discharge Rates

Service Effects

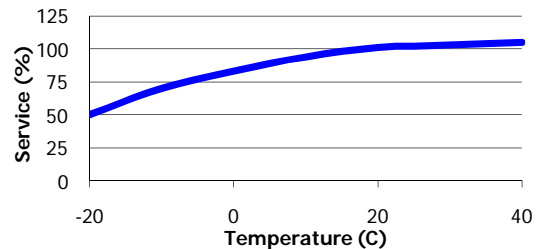

Storage Effects

