


ENERGIZER E96

AAAA



Industry Standard Dimensions

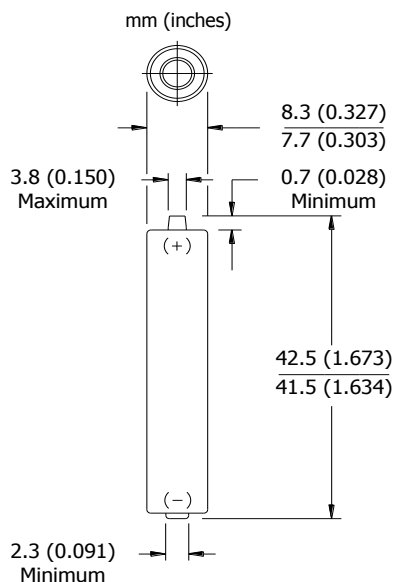


Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂)
	No added mercury or cadmium
Designation:	ANSI-25A, IEC-LR8D425, LR61
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	6.5 grams (0.2 oz.)
Typical Volume:	2.2 cubic centimeters (0.1 cubic inch)
Jacket:	Plastic Label
Shelf Life:	5 years at 21°C
Terminal:	Flat Contact

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

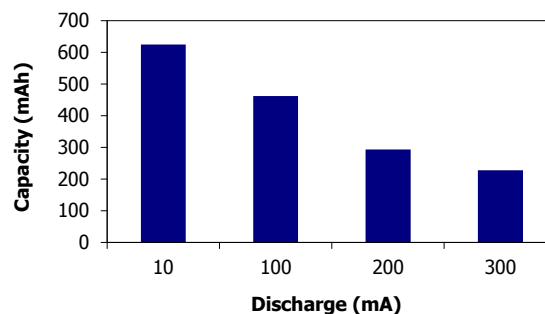

Device Selection Guide:

Battery Selection Indicator

Tape Player



Lighting



Laser pointer



High Drain Devices

Moderate Drain Devices

Low Drain Devices

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

Made in China