



RECIPROCATING SAWS

SPECIFICATIONS

	DW311K	DW310K	DWE305K	DWE357
Amps	13 Amps	12 Amps	12 Amps	12 Amps
Strokes/Min	0 - 2,700 spm	0 - 2,700 spm	0 - 2,900 spm	0 - 2,800 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Twist	Twist	Lever	Lever
4-Position Blade Clamp	No	No	Yes	Yes
Adjustable Shoe	Yes	Yes	No	No
Variable-Speed Trigger	Yes	Yes	Yes	Yes
Variable-Speed Dial	Yes	No	No	No
Orbital Action	Yes	No	No	No
Anti-Slip Comfort Grip	Yes	No	Yes	Yes




CIRCULAR SAWS



SPECIFICATIONS	DW384	DW364	DWS535 / DWS535T	DWE575	DWE575SB	DWE575DC
Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	-
Max Watts Out	2,075 W	2,075 W	2,100 W	1,950 W	1,950 W	-
No Load Speed	5,800 rpm	5,800 rpm	4,800 rpm	5,200 rpm	5,200 rpm	-
Bevel Capacity	50°	50°	53°	57°	57°	-
Bevel Stops	N/A	N/A	45° / 22.5°	45° / 22.5°	45° / 22.5°	-
Rear Pivot	Yes	Yes	No	No	No	-
Electric Brake	Yes	Yes	No	No	Yes	-
Blade Diameter	8-1/4"	7-1/4"	7-1/4"	7-1/4"	7-1/4"	-
Depth Of Cut At 90°	2-15/16"	2-7/16"	2-7/16"	2.55"	2.55"	-
Depth Of Cut At 45°	2-1/4"	1-7/8"	1-7/8"	1-7/8"	1-7/8"	1-7/8"
Includes	Carbide tipped blade and blade wrench	Carbide tipped blade and blade wrench	Carbide tipped 7-1/4" blade, blade wrench / carbide tipped 7-1/4" blade, blade wrench, pre-installed w/ twistlock plug	Carbide tipped 7-1/4" blade and blade wrench	Carbide tipped 7-1/4" blade and blade wrench	Replacement lower guard lever and fastening screws (3)

JIG SAWS

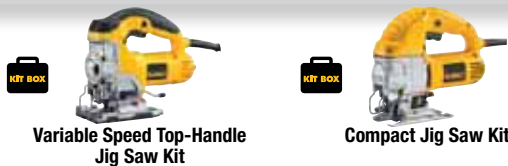

SPECIFICATIONS	DW331K	DW317K
Amps	6.5 Amps	5.5 Amps
Strokes/Min	500 - 3,100 spm	0 - 3,100 spm
Stroke Length	1"	1"
Keyless Blade Clamp	Yes	Yes
Dust Blower	Yes	No
Orbital Action	4-position	4-position
Tool Weight	6.4 lbs	6.2 lbs

SCROLL SAW



SPECIFICATIONS	DW788	SCROLL SAW ATTACHMENTS
Amps	1.3 Amps	
Strokes/Min	400 - 1,750 spm	
Stroke Length	3/4"	
Depth of Cut (inches)	2"	
Tool Weight	56 lbs	
Includes	Hex wrench and blades	DW7880 - Scroll Saw Stand DW7881 - Scroll Saw Worklight



MULTI-TOOL



SPECIFICATIONS	DWE315K
Amps	3.0 Amps
Oscillations/Min	0 - 22,000 opm
Variable Speed	Yes
Keyless Accessory Change	Yes
LED Light	Yes
Accessories Included	29
Tool Weight	3.1 lbs
Includes	DeWALT Oscillating Tool Guide System, bi-metal plunge cut blade, fast-cut wood blade, semi-circle flush cut blade, sanding pad, (25) sheets of sand paper, accessory storage box and multi-brand accessory adaptor

TILE SAW



10" (254 mm)
Wet Tile Saw



10" (254 mm)
Wet Tile Saw w/ Stand

SPECIFICATIONS	D24000	D24000S
Amps	15 Amps	15 Amps
Blade Diameter	10"	10"
Max Rip Capacity	24" Tile	24" Tile
Diagonal Cut Capacity	18" Tile	18" Tile
Plunge Feature	Yes	Yes
Max. Depth of Cut	3-1/8"	3-1/8"
Integrated 45° Miter	Yes	Yes
Integrated 22.5° Miter	Yes	Yes
Length	34"	34"
Tool Weight	69 lbs	69 lbs

TILE SAW ATTACHMENTS
D24001 – Wet Tile Saw Stand

HANDHELD TILE SAW



4-3/8" (111.1 mm) Wet/Dry
Handheld Tile Saw

SPECIFICATIONS	DWC860W
Amps	10.8 Amps
Bevel Capacity	45°
rpm	13,000 rpm
Arbor Size	20 mm
Tool Weight	6.6 lbs
Includes	12' Water line and regulator, 4-3/8" DeWALT diamond blade and 2 wrenches

TABLE SAWS



10" (254 mm) Compact Job
Site Table Saw with Site-Pro™
Modular Guarding System



10" (254 mm) Job Site Table Saw with
Site-Pro™ Modular Guarding System



10" (254 mm) Compact Job Site
Table Saw w/ Rolling Stand



10" (254 mm) Jobsite Table Saw with
Guard Detect and w/ Rolling Stand

SPECIFICATIONS	DWE7480	DWE7490X	DWE7491RS	DWE7499GD
Amps	15 Amps	15 Amps	15 Amps	15 Amps
No Load Speed	4,800 rpm	4,800 rpm	4,800 rpm	4,800 rpm
Blade Diameter	10"	10"	10"	10"
Arbor Size	5/8"	5/8"	5/8"	5/8"
Dust Port Diameter	2-1/2"	2-1/2"	2-1/2"	2-1/2"
Depth of Cut at 90°	3-1/8"	3-1/8"	3-1/8"	3-1/8"
Depth of Cut at 45°	2-1/4"	2-1/4"	2-1/4"	2-1/4"
Max Rip to Right of Blade	24"	28 1/4"	32-1/2"	32-1/2"
Max Rip to Left of Blade	12"	16-1/2"	22"	22"
Max Width of Dado	N/A	13/16"	13/16"	13/16"
Includes	Miter gauge, push stick, 10" 24T carbide blade and blade guard	Miter gauge, push stick, 10" 24T carbide blade, blade guard and folding table saw stand (DW7440)	Miter gauge, push stick, 10" 24T carbide blade, blade guard and rolling table saw stand (DW7440RS)	Miter gauge, push stick, 10" 24T carbide blade, blade guard and rolling table saw stand (DW7440RS)

Portable Table Saw Attachments

DW7441 – Out feed and Side Support	DW7452 – Thick Kerf Riving Knife for DW745	DWE74911 – Rolling Table Saw Stand
DW7444 – Dado Throat Plate for DW744X	DW7440RS – Rolling Table Saw Stand for DW744X	
DW7450+ – Table Saw Stand for DW745	DWE7402DI – Dado Throatplate for 10" Portable Table Saw - (DWE7490X, DWE7491RS and DWE7499GD)	

*Available through service only

TRACK SAWS



6-1/2" (165 mm)
TrackSaw™ Kit



TrackSaw™ Kit with
59" (149 cm) and 102" (259 cm) Tracks



TrackSaw™ Kit with
59" (149 cm) Track

SPECIFICATIONS	DWS520K	DWS520CK	DWS520SK
Power	12 Amp, 1300 W	12 Amp, 1300 W	12 Amp, 1300 W
No Load Speed	1,750 - 4,000 rpm	1,750 - 4,000 rpm	1,750 - 4,000 rpm
Blade Diameter	6-1/2"	6-1/2"	6-1/2"
Bevel Capacity	47°	47°	47°
Max. Cut at 90°	2-1/8"	2-1/8"	2-1/8"
Max. Cut at 45°	1-5/8"	1-5/8"	1-5/8"
Weight	11.5 lbs	11.5 lbs	11.5 lbs
Includes	6-1/2" (20 mm arbor size) 48T ultra fine finishing blade and blade wrench	6-1/2" (20 mm arbor size) 48T ultra fine finishing blade, 59" track, 102" Track and blade wrench	6-1/2" (20 mm arbor size) 48T ultra fine finishing blade, 59" Track and blade wrench

Track Saw Attachments

DW5240 – Precision ground woodworking blade for TrackSaw™ System - 40T	DWS5023 – 102" (259 cm) TrackSaw™ Track	DWS5031 – TrackSaw™ Router Adapter
DW5258 – Precision ground woodworking blade for TrackSaw™ System - 48T	DWS5025 – TrackSaw™ Track Bag	DWS5032 – TrackSaw™ Replacement Friction Strip
DWS5020 – 46" (116.8 cm) TrackSaw™ Track	DWS5026 – TrackSaw™ Track Clamps	
DWS5022 – 59" (149.8 cm) TrackSaw™ Track	DWS5029 – TrackSaw™ Replacement Zero-clearance Anti Splinter Strip	

MITER SAWS



12" (305 mm) Double Bevel Sliding Compound Miter Saw



10" (254 mm) Double Bevel Sliding Compound Miter Saw



12" (305 mm) Double Bevel Compound Miter Saw with Light



12" (305 mm) Double Bevel Compound Miter Saw

SPECIFICATIONS	DWS780	DW717	DW716XPS	DW716
Amps	15 Amps	15 Amps	15 Amps	15 Amps
No Load Speed	3,800 rpm	4,000 rpm	3,800 rpm	3,800 rpm
Blade Diameter	12"	10"	12"	12"
Arbor Size	5/8" or 1"	5/8"	5/8" or 1"	5/8" or 1"
Vertical Capacity	6-3/4"	6" Left - 3-1/2" Right"	6-1/2"	6-1/2"
Vertically Nested Capacity	7-1/2"	6 1/4"	6-5/8"	6-5/8"
Horizontal Capacity (MAX with back fence)	16"	14"	8" (10" with back fence)	8" (10" with back fence)
Includes	XPS light, Carbide blade, blade wrench, dust bag and vertical material clamp	Carbide blade, blade wrench, dust bag and vertical material clamp	Carbide blade, dust bag and blade wrench	Carbide blade, dust bag and blade wrench



12" (305 mm) Single Bevel Compound Miter Saw



10" (254 mm) Single Bevel Miter Saw

SPECIFICATIONS	DW715	DW713
Amps	15 Amps	15 Amps
No Load Speed	4,000 rpm	5,000 rpm
Blade Diameter	12"	10"
Arbor Size	5/8" or 1"	5/8"
Vertical Capacity	6-1/2"	3-1/2"
Vertically Nested Capacity	5-1/4"	4-1/2"
Horizontal Capacity	8"	6"
Includes	Carbide blade, dust bag and blade wrench	Carbide blade, dust bag and blade wrench

MITER SAW STANDS



Miter Saw Stand



Compact Miter Saw Stand



Work Stand



Work Stand with Miter Saw Mounting Brackets



Rolling Miter Saw Stand

SPECIFICATIONS	DWX723	DWX724	DWX725	DWX725B	DWX726
Support Width	Up to 150"	Up to 100"	Up to 36"	Up to 36"	Up to 96"
Max. Capacity	500 lbs	500 lbs	1,000 lbs	1,000 lbs	300 lbs
Unit Weight	35 lbs	30 lbs	15.4 lbs	17.1 lbs	67 lbs
Includes	(2) Convertible work supports/stops and (2) mounting brackets	(2) Convertible work supports/stops and (2) mounting brackets	-	(2) Mounting brackets	-

Miter Saw/Stand Attachments

	DW7026 – Miter Saw Stand Carry Strap		DW7080 [†] – Extension Kit (for DW712, DW713, DW715, DW716, DW717 & DW718)		DW7232 – Miter Saw Workstation Work Piece Support and Length Stop (for DWX723 and DWX724 stands)
	DW7027 – Wide Roller Material Support		DW7082 – Vertical Clamp (for DW712, DW713, DW715, DW716, DW717 & DW718)		
	DW7028 – Miter Saw Stand Extension Support		DW7084 – Crown Stops (for DW712, DW713, DW715, DW716, DW717, DW718 & DWS780)		
	DW7029 – Wide Miter Saw Stand Material Support and Stop		DW7231 – Miter Saw Workstation Tool Mounting Brackets (for DWX723, DWX724 and DWX725 stands)		
	DW7053 – Dust Bag (for all DeWALT Miter Saws)				
	DW7055 – Miter Saw Replacement Kerf Plate (for DW715 & DW716)				

[†]Available through service only