ALKALINE BATTERY
A25 6V

Specification:

-For small devices including security alarms, electronic transmitters, and remote control devices
-9 volt alkaline cell
-Equivalent to GP25A, GP29A, Golden Power 32A
-Not to be confused with Golden Power A25 6V battery
-Item Weight: 3.2 ounces
-Nominal Voltage :6V
-Average Weight:1.8g
- nominal Capacity: 14mAh (Continuous discharge at 20+/-2° C under Ω discharge load to 3.6V end point voltage)

Electrical Characteristics

Test conditions: 100Ω+/-0.5% load resistance, measuring time 0.3 seconds, temperature at 20+/-2 °C, tested within 30 days after delivery.

	Off-Load Voltage (V)	On-Load Voltage (V)	Test Specification
New Battery	6.05	3.5	MIL-STD 105E, Class II, Double Sampling, AQL=0.4

Service Output

Condition: Test temperature 20 +/- 2°C, tested within 30 days after delivery

Standard	Discharge Condition			Average Minimum Discharge Time	
	Discharge Load	Discharge Time	E.P.V. (V)	New Battery	After 12 mths. at room temperature
IEC	20kΩ	24 hr	3.6	56 hr	50 hr

Dimensions (in mm) :

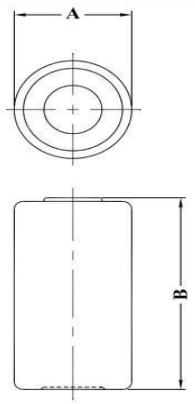

Dimensions	Specification
A	⌀ 7.7 - 8.0
B	13.50 - 14.00

Made in China