



## Dial Indicator, Back Plunger 0,1mm, 0,001mm, One Rev., Shockproof

Item number: 2990T-10




### Description


This is a back plunger type dial indicator with bezel  $\varnothing$  55 - 58 mm.

### Features

Range:	<b>0,1 mm (plunger stroke: 4mm)</b>
Range per rev.:	<b>0.14 mm</b>
Graduation:	<b>0.001 mm</b>
MPE any 1/10 revolution:	<b>2 <math>\mu</math>m</b>
MPE measuring range:	<b>4 <math>\mu</math>m</b>
H MPE (Hysteresis):	<b>2 <math>\mu</math>m</b>
R MPE (Repeatability):	<b>1 <math>\mu</math>m</b>
Mass:	<b>220 g</b>
Stem:	<b>8 mm</b>
Contact point:	<b>Carbide tipped, thread: M 2.5 x 0.45 mm</b>
Delivered:	<b>with certificate of inspection, limit indicators</b>
One revolution:	<b>Yes</b>
Shockproof:	<b>Yes</b>
Digital/Analog:	<b>Analog</b>
Inch-Metric:	<b>Metric</b>
fu:	<b>2 <math>\mu</math>m</b>

### Dimensions

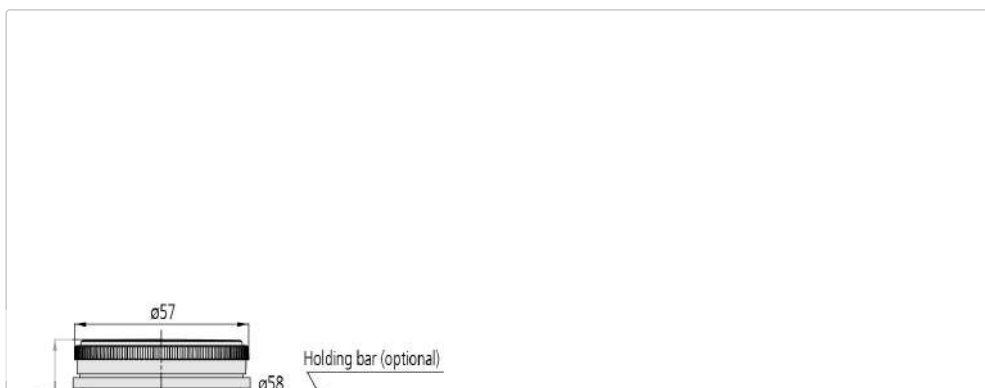

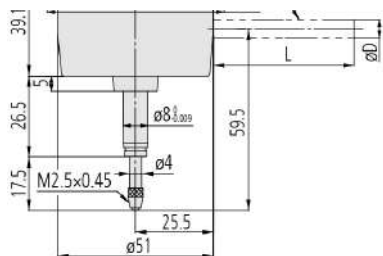

## Accessories

### Optional accessories:



#### Holding Bar for Back Plunger Indicator

Ø8mm, 81mm Length

136568

Suggested retail price: 9.00 €\*



#### Holding Bar for Back Plunger Indicator

Ø8mm, 42mm Length

21AAA168

Suggested retail price: 7.00 €\*



#### Holding Bar for Back Plunger Indicator

Ø6mm, 81mm Length

136567

Suggested retail price: 8.00 €\*



#### Holding Bar for Back Plunger Indicator

Ø6mm, 42mm Length

21AAA166

Suggested retail price: 7.00 €\*



#### Limit Hands (green) 2pcs

2000, 3000, 4000

21AZB195

Price on application

## Spare parts

### Consumable spares:



#### Contact Element Ball Point

7,3mm Length, Carbide, Metric

901312



#### Contact Element Ball Point

8,3mm Length, Metric

21AZA319