


MANUAL LEVER HOIST

Palan A Levier Manuel

Characteristics

- TOYOLIFT lever hoist is universal, manual hoist for tensioning and lashing in any direction.
- The ratchet lever hoist features compact design and robust, deep drawn, stamped steel construction.
- High quality materials ensure light weight without infringing reliability.
- Asbestos free brake, holding load at any desired height.
- Top & Bottom hooks are fitted with safety latches as standard.
- The load chain can be pulled freely and easily through the hoist in both directions to attach the load or to tension the chain.
- Short hand lever with rubber grip.
- Hand lever operates with little effort due to optimal gear ratio.
- Drop forged steel suspension & load hooks are heat treated.
- The hoist is fitted with high grade 80 alloy load chain (black and galvanized with T8 mark)
- Complies with EC Council Directive 2006/42/EC, BS EN 13157 and in accordance with ASME B30.21 requirements.

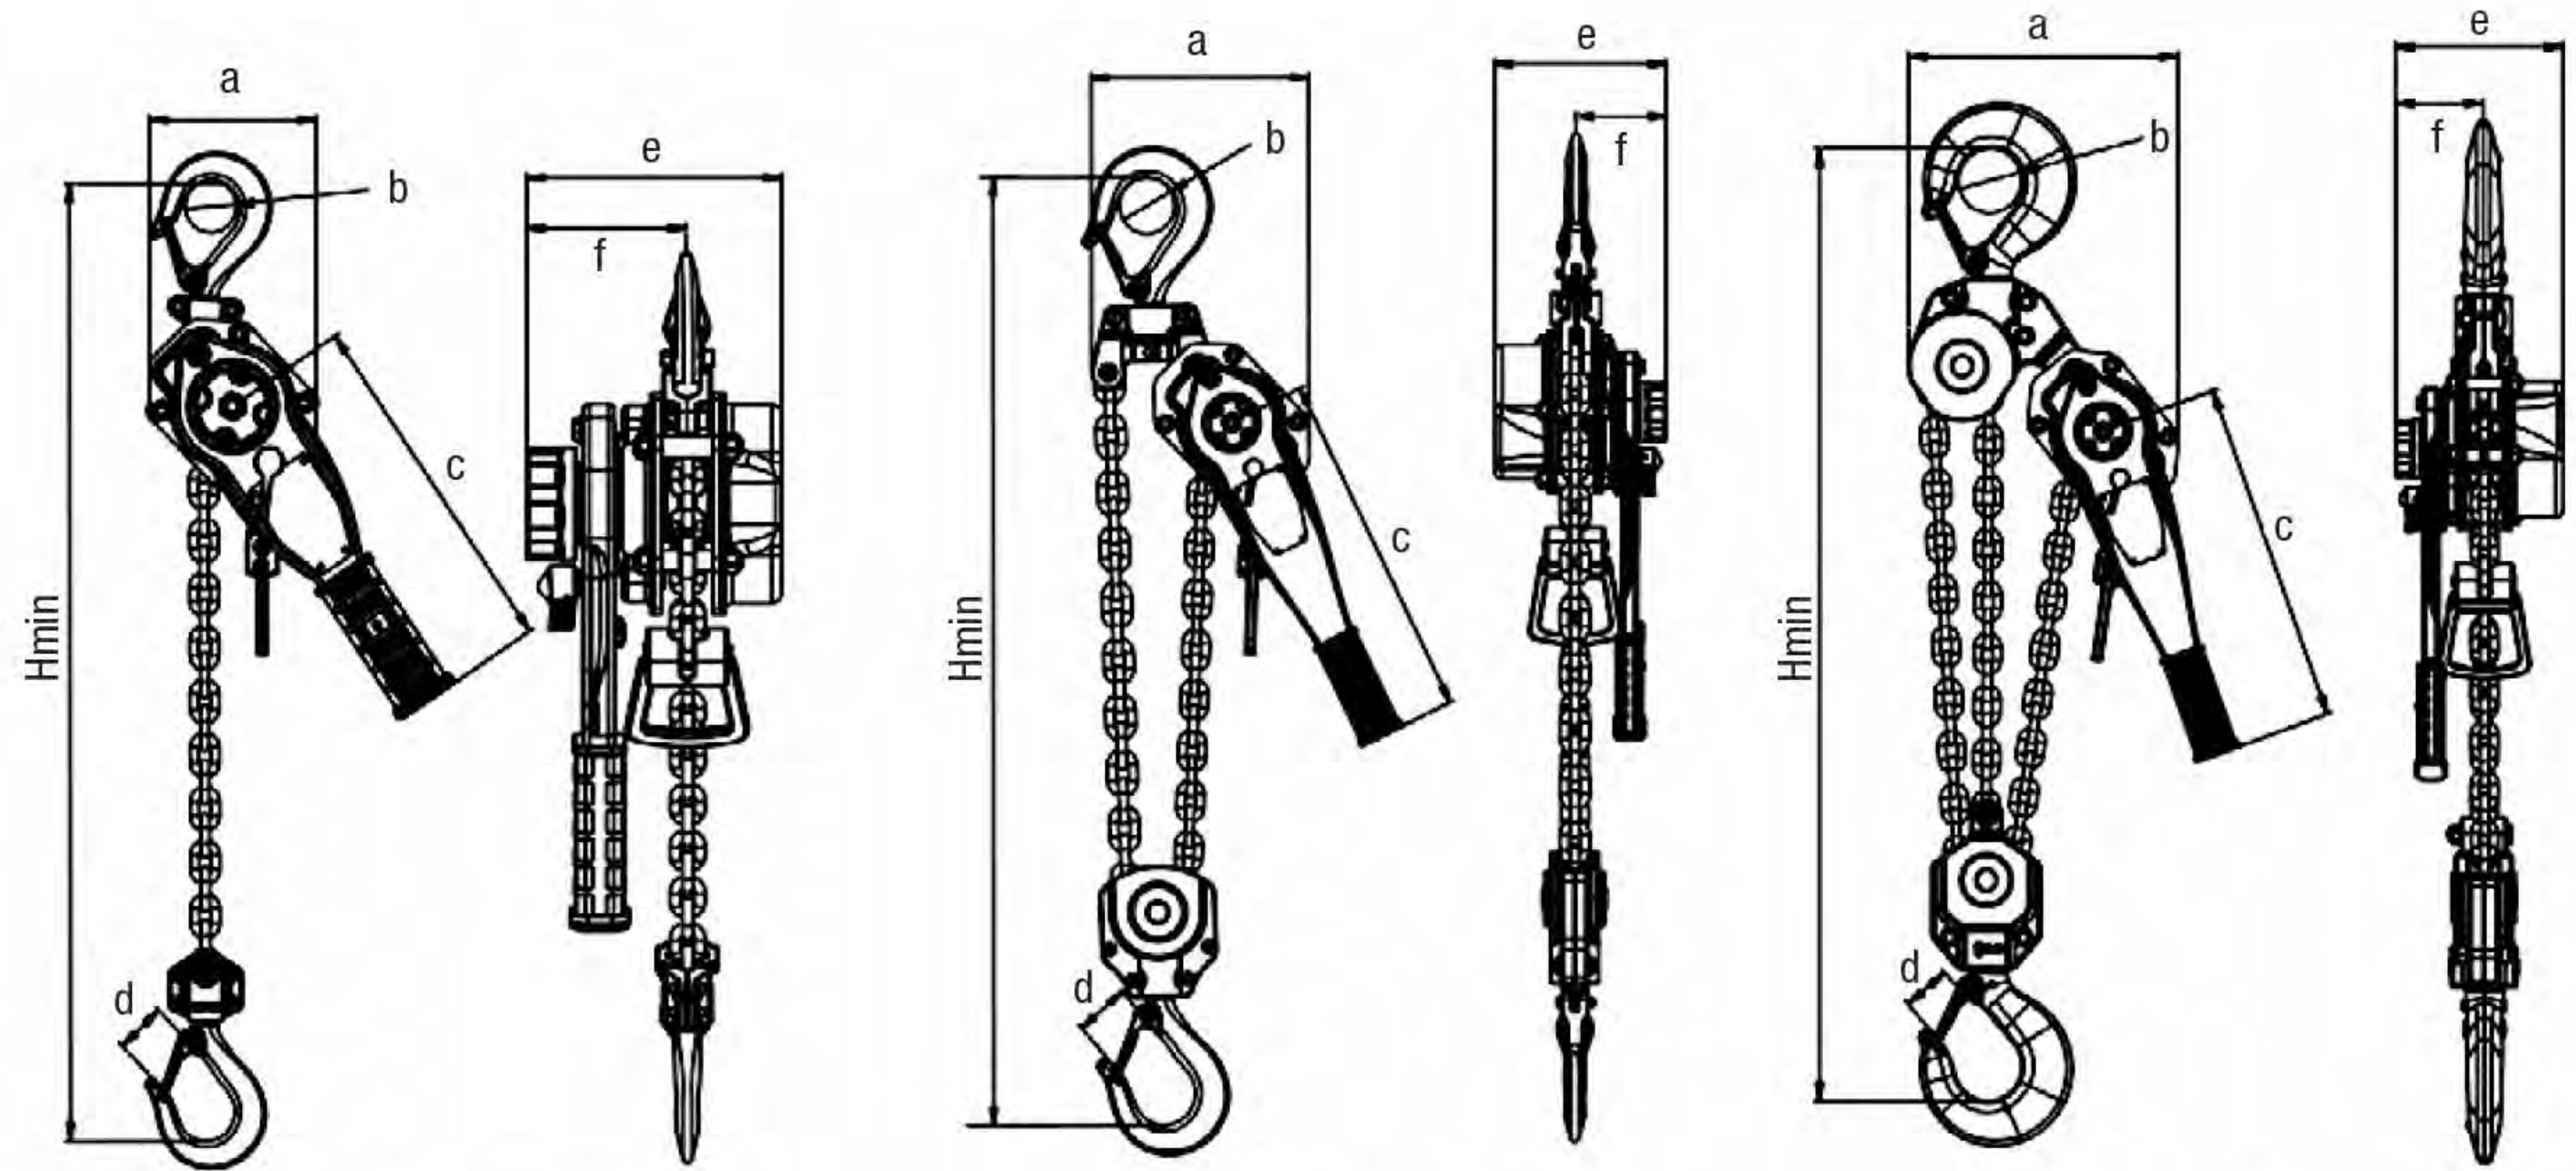

TL-LDH 0.75/3T

TL-LDH 6T

TL-LDH 9T



LEVER HOIST [Model:TL-LDH]						
MODEL	TL-LDH	TL-LDH075	TL-LDH150	TL-LDH300	TL-LDH600	TL-LDH900
Safe Working Load	kg	750	1500	3000	6000	9000
Standard Length	m	1.5	1.5	1.5	1.5	1.5
Load chain number of falls		1	1	1	2	3
Effort required to lift max load	N	220	240	330	360	380
Running test load	kg	1125	2250	4500	9000	13500
Load chain Size	mm	6x18	7.1x21	9x27	9x27	9x27
Net weight	kg	5.3	8.6	15.2	23	43
Gross weight	kg	5.6	8.9	15.6	23.5	44.5
Packing Dimensions	cm	31.5x16x12	35x18x13	48x20x13.5	48x21.5x17	53x28x25
Extra Weight/ meter of lifting	kg/m	0.7	1.1	1.8	3.6	5.4
Dimensions (mm)	a	115	137	169	238	300
	b	39	44	60	68	91
	c	239	259	374	374	374
	d	28	32	41	47	61
	e	146	162	187	187	187
	f	91	95	98	98	98
	Hmin	320	360	431	500	635

*Remarks : Hoists with the lift in other length are also available

All dimensions are subject to change without prior notice